


# Vanity / Utility Fixture

# VL

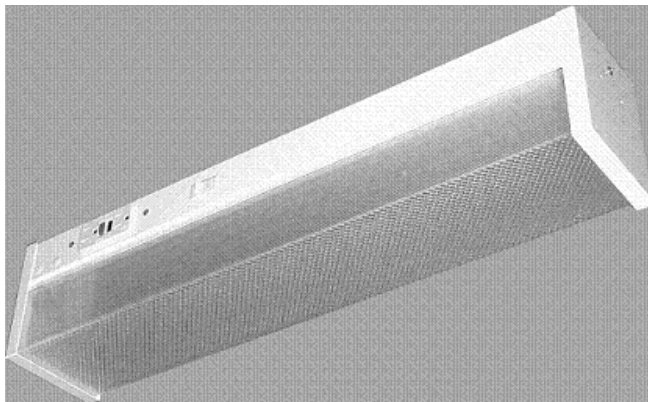

## Product Description

The VL fixture is a compact lensed fixture designed for use in vanities. Other applications include: stairwells, utility areas, corridors and restrooms. A wide range of options allow the customer to customize the VL to maximize ease of use.

The VL is manufactured with all the knockouts necessary for standard surface or pendant mounting on the ceiling or wall.

All fixtures utilize U.L approved components, are U.L approved and will bear U.L labels.

## General Construction

The VL fixture housing and end caps are brake formed from heavy gauge cold rolled steel. 87% reflective white enamel finish is utilized.

The optical reflector system is precision brake formed of the selected aluminum material. The one piece reflector is removable without the use of tools, using ¼ turn fasteners to secure it in place.

Polycarbonate rotary style locking lampholders are utilized for F32T8 and F54T5HO systems to ensure positive lamp retention and long life in high temperature applications.

A clear, 0.1" prismatic acrylic lens is standard with the VL fixture. Alternate lens options are also available.

## FIXTURE ORDERING INFORMATION

FIXTURE SERIES	LENS	# LAMPS	LAMP TYPE	VOLTAGE	#BALLASTS	BALLAST TYPE	REFLECTOR	OPTIONS	LAMP COLOR
VL	BLANK	1	14	12	1	HI	E	NYC	835
	DSW	2	17	27		LI	A	F	841
	DCP	21	34	SI		W	E (#)	850	
		25	UV	PS		CLD	865		
		28	HV	PD		CO			
		32	BF						
					S(TYPE)				

### Lens Options:

BLANK – Clear Prismatic Acrylic  
 DSW – Smooth White Acrylic  
 DCP – Clear Polycarbonate Prismatic.

### Voltage Selections:

12 – 120V  
 27 – 277V  
 34 – 347V  
 UV – 120-277V  
 HV – 347-480V  
 (T5HO Only)

### Lamp Selections:

14 – F14T5  
 17 – F17T8  
 21 – F21T5  
 25 – F25T8  
 28 – F28T5  
 32 – F32T8

### Ballast Selections:

HI – High BF Electronic Instant Start  
 LI – Low BF Electronic Instant Start  
 SI – Standard BF Electronic Instant Start  
 PS – Programmed Start Electronic  
 PD – Programmed Start Dimming

### Reflector Selections:

E – Enhanced Aluminum  
 A – Polished Aluminum  
 W – Highly Reflective White

### Option Selections:

NYC – 20 Gauge NYC Approved  
 F – Inline Fuse  
 E (#) – Emergency Pack (Specify # of required Lumens)  
 CLD – Center Lamp Divider  
 CO – Convenience Outlet  
 BF – Front Baffle  
 S(P) – Pull Chain Switch  
 S(R) – Rotary Switch  
 S(T) – Toggle Switch  
 S(B) – Button Switch  
 S(2C/4P) – 2 circuit/4 Position Switch



Phone: 1-800-541-9082  
 Fax: 1-888-214-7667  
 Web: www.optimumlighting.com

TYPE :

CAT# :

PROJECT :