

# A13 SERIES | Aisle Area Light Distribution Fluorescent High-Bay

## Product Description

A high efficiency, 13" wide fluorescent high-bay that provides ideal light distribution for aisles and narrow spaces in a narrow profile housing. Applications include warehouses, manufacturing facilities, distribution centers and storage facilities.

**Heat Dissipation** – In order to achieve optimal heat dissipation, the housing has louvers, and the reflector is slotted for appropriate air flow.

**Light Distribution** – Light is controlled in a narrow distribution, maximizes downlight and light levels directly below the fixture. This fixture is ideal for narrow aisles and those with tall racking. When used in aisles with racking or shelving, turning this fixture parallel to the aisle maximizes the light hitting the floor, while minimizing light loss to the racking.

## Mounting Methods

A13 fixtures offer flexible mounting methods that most commonly include: standard chain hangers and surface mounting. There are several other mounting options for this fixture series, and they are listed as "hanging options" below.

### Hanging Options Include:

- Surface Mount [Mounting holes provided in the housing] (Standard)
- Chain Mount [Chain hangers are supplied with the fixture] (Standard)
- Quick Cable [QC – Quick hang cable system] (Optional)
- Junction Box [JB – Slide-on splice box for 3/4" stem] (Optional)
- Pendant Stabilizer [PS – Bracket for stabilizing fixture when single point hanging with a 3/4" stem] (Optional)

- Quick Bracket System [QB – Innovative hanging system for easy installation. Available with various connection points] (Optional)
- Hook [SPSH – 12" Stem, pendant stabilizer & hook for hanging in loop or eye-bolt] (Optional)
- Quick Toggle [SPST – 12" Stem, pendant stabilizer & quick toggle hanger for hanging in an eye-bolt] (Optional)

## Product Construction

The A13 fixture housing is brake formed from heavy gauge cold rolled steel. Ends and socket plates are permanently riveted together for strength and rigidity. The housing is post painted with a durable, highly reflective powder-coat finish. A pre-finished housing is available as an option.

**Optical Reflector** system is precision brake formed of the selected aluminum material: enhanced aluminum or highly reflective white. The one piece reflector is removable without the use of tools, using 1/4 turn fasteners to secure it in place.

**Lampholders** are made of a Polycarbonate material; these locking-style lampholders are utilized to ensure positive lamp retention. Additionally, the material contributes to a longer life product in high temperature applications.

**Ballasts** are electronic programmed-start (T5HO) or instant-start (T8) as a standard. Optional ballasts are available, consult factory for available systems and system specifications. Available voltages: 120v, 277v, 347v, voltage sensing 120-277v and 347-480v.

**Listings** – All fixtures are UL and CUL listed.

## Photometric Data


LTL NUMBER: 13061  
CAT#: A13 332 UV 1SI E 841

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXT
0-30	2259	26.4	28.5
0-40	3560	41.6	44.9
0-60	5986	70.0	75.5
0-90	7929	92.7	100.0
90-120	0	0.0	0.0
90-130	0	0.0	0.0
90-150	0	0.0	0.0
90-180	0	0.0	0.0
0-180	7929	92.7	100.0

TOTAL LUMINAIRE EFFICIENCY: 92.7%

CIE TYPE:	DIRECT	90-DEG
PLANE:	0-DEG	0.9
SPACING CRITERIA:	1.2	

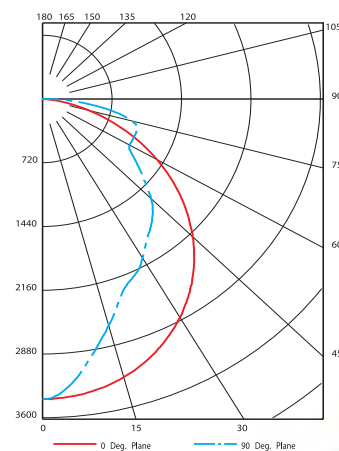

Made in the USA

HIGH/LOW BAY  
FIXTURES



The Brightest Energy Solution

Phone: (800) 541-9082 Fax: (888) 214-7667 Web: www.optimumlighting.com

### A13 – Fixture Ordering Information

Fixture Series	Lens	# of Lamps	Lamp Type	Voltage	# Ballasts	Ballast Type	Reflector	Hanging	Options	Lamp Color	Lamp Options*3
A13	—	2	32	12	1	HI	E	BLANK	C ( )	BLANK	HP
A13P*1	—	3	54	27	2	LI	W	JB	6T1	830	A
A13T*2	—	4		34	3	SI	B	PS	6T2	835	TG
A13PT*1/*2	—			UV		SI+		QB ( )	E ( )	841	SS
				HV		PS		QBH ( )	F	850	ES ( )
						PSL		QBT ( )	OS ( )		XL
						PSH		QC	SC		
						PD		QC ( )	WG		
						SDH		SPSH	20G		
						AX		SPST	SDT		
									PC		

Please Specify When Ordering:

Fixture Series	Lens	# of Lamps	Lamp Type	Voltage	# Ballasts	Ballast Type	Reflector	Hanging	Options	Lamp Color	Lamp Options
A13	—										

\*1 Standard A13 is postpainted (Scratch resistant, coated edges to prevent rusting). A13P is an economical Prepainted option (Small orders of A13P not available with Custom JB Hanging Option)

\*2 A13T & A13PT are 8ft tandem fixtures, # lamps are for the profile of the fixture.

\*3 Consult Factory for Manufacturer Specific Ordering Codes/Availability.

#### Lamp Type Selections

- 32 F32T8 System
- 54 F54T5HO System

#### Voltage Selections

- 12 120V
- 27 277V
- 34 347V
- UV 120-277V
- HV 347-480V

#### Ballast Selections

- HI High Ballast Factor (HBF) Electronic\*
- LI Low Ballast Factor (LBF) Electronic\*
- SI Standard Ballast Factor (NBF) Electronic\*
- SI+ 1.0BF Electronic\*
- PS Programmed Start (NBF)
- PSL Programmed Start LBF\*
- PSH Programmed Start HBF\*
- PD Programmed Start Dimming
- SDH Step Dimming HBF (100% to 60% Dimming)\*
- AX Daylight Harvesting Ballast with remote mount photosensor\*

\* T8 Only

#### Reflector Selections

- E Enhanced Aluminum
- W Highly Reflective White Aluminum
- B 95% Reflective Extreme White Aluminum

#### Hanging Selections

- BLANK V-Chain Hangers
- JB Slide-On Junction Box
- PS Pendant Stabilizer
- QB Quick Bracket (24", 30" or 36")
- QBH Quick Bracket with Hook (24", 30" or 36")
- QBT Quick Bracket for Threaded Rod (24", 30" or 36")
- QC Quick Hang Cable (10')
- QC( ) Quick Hang Cable (Specify Length)
- SPSH 12" Stem/PS/Hook
- SPST 12" Stem/PS/Toggle

#### Options Selections

- C( ) Single Circuit Cord (Specify Length)
- 6T1 6' Cord with L5-15 Locking End
- 6T2 6' Cord with L7-15 Locking End
- E( ) Emergency Pack (# Lumens)
- F Inline Fuse
- OS( ) Occupancy Sensor (Specify Lamps on Low/Lamps on High)
- SC Safety Cable
- WG Wire Guard
- 20G 20 gauge NYC Standards
- SDT Step Down Transformer (480V to 277V)
- PC Photocell

#### Lamp Color Selections:

- BLANK Lamps Not Included
- 830 80+ CRI, 3000K
- 835 80+ CRI, 3500K
- 841 80+ CRI, 4100K
- 850 80+ CRI, 5000K

#### Lamp Options Selections:

- HP High Performance, Long Life Lamps\*
- A Amalgam Tip Lamps\*\*
- TG Tubeguarded Lamps
- SS Shattershielded Lamps
- ES( ) Energy Saver (Specify Wattage)
- XL Long Life\*


\* T8 Only  
\*\* T5HO Only

### Common Fixture Selections

Catalog Number	System	# of Lamps	Wattage (120/277V)*	Initial System Lumens*	Mean System Lumens*
A13 254 UV 1PS W	T5HO	2	116w / 115w	10,000	9,500
A13 332 UV 1PSH E	T8	3	110w / 108w	10,695	10,350
A13 432 UV 1HI E	T8	4	148w / 145w	14,632	14,160
A13P 454 UV 1PS E	T5HO	4	232w / 226w	20,000	19,000

\*Wattages may vary depending on the ballast manufacturer and lamp type used.

Initial and mean system lumens are the initial/mean lumen output of the lamp/ballast system as rated by lamp and ballast manufacturer and may vary from manufacturer to manufacturer. Specifications and dimensions subject to change without notice. Contact Optimum Lighting for current availability and ordering information.

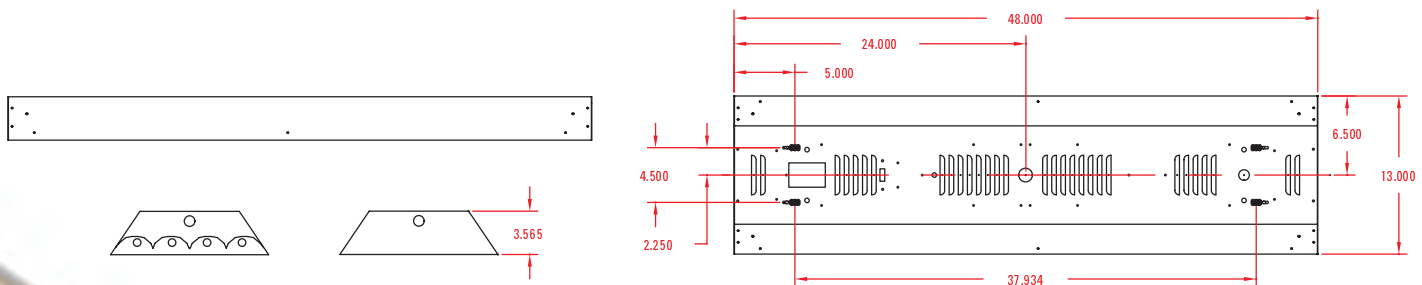

Fixture Type: \_\_\_\_\_

Catalog #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Project: \_\_\_\_\_