



GUN SERIES | **Aesthetic Lensed Fluorescent High-Bay with Uplight.**

Product Description

An aesthetically pleasing, high efficiency fluorescent high-bay that provides exceptional light distribution for general areas with a narrow design that allows for uplight. The clean and crisp look of the GUN coupled with the uplight component make it an ideal choice for retail applications. Other applications include warehouses, manufacturing facilities, museums, hotels and gymnasiums with the wireguard safety option.

Light Distribution – The bottom arc angle of this fixture series provides a wide distribution pattern – excellent for use in general or open areas. When used in aisles with racking or shelving, turning this fixture perpendicular to the aisle allows the bottom arc to throw light evenly along the floor, lighting between the fixtures. The arced bottom also enhances the vertical footcandles, providing more even illumination down the product walls.

Mounting Methods

GUN fixtures offer flexible mounting methods that most commonly include: standard chain hangers and surface mounting. There are several other mounting options for this fixture series, and they are listed as “hanging options” below.

Hanging Options Include:

- Surface Mount [Mounting holes provided in the housing] (Standard)
- Chain Mount [Chain hangers are supplied with the fixture] (Standard)
- Quick Cable [QC – Quick hang cable system] (Optional)
- Junction Box [JB – Slide-on splice box for 3/4” stem] (Optional)
- Pendant Stabilizer [PS – Bracket for stabilizing fixture when single point hanging with a 3/4” stem] (Optional)
- Quick Bracket System [QB – Innovative hanging system for easy installation. Available with various connection points] (Optional)
- Hook [SPSH – 12” Stem, pendant stabilizer & hook for hanging in loop or eye-bolt] (Optional)
- Quick Toggle [SPST – 12” Stem, pendant stabilizer & quick toggle hanger for hanging in an eye-bolt] (Optional)

Product Construction

The GUN fixture housing is brake formed from heavy gauge cold rolled steel. Ends and socket plates are permanently riveted together for strength and rigidity. The housing is post painted with a durable, highly reflective powder-coat finish. Venting is incorporated to ensure optimal fixture performance.

Optical Reflector system is precision brake formed of theselected aluminum material: enhanced aluminum or highly reflective white. The one piece reflector is removable without the use of tools, using 1/4 turn fasteners to secure it in place.

Lampholders are made of a Polycarbonate material; these locking-style lampholders are utilized to ensure positive lamp retention. Additionally, the material contributes to a longer life product in high temperature applications.

Lens Standard lens is a high efficiency, high dispersion 23 pattern clear acrylic. Optional lenses are available, see ordering information. Standard uplight lenses are 23 pattern with all lens options.

Ballasts are electronic programmed-start (T5HO) or instant-start (T8) as a standard. Optional ballasts are available, consult factory for available systems and system specifications. Available voltages: 120v, 277v, 347v, voltage sensing 120-277v and 347-480v.

Listings – All fixtures are UL and CUL listed.

Patents – U.S. Patent #7,070,303 & 7,594,736



Made in the USA



The Brightest Energy Solution

Phone: (800) 541-9082 Fax: (888) 214-7667 Web: www.optimumlighting.com

GUN – Fixture Ordering Information

Fixture Series	Lens	# of Lamps	Lamp Type	Voltage	# Ballasts	Ballast Type	Reflector	Hanging	Options	Lamp Color	Lamp Options*4
GUN	D23	2	32	12	1	HI	E	BLANK	C ()	BLANK	HP
	D23FD*1	3	54	27	2	LI	W	JB*3	6T1	830	A
	DL1	4*2		34		SI	B	PS*3	6T2	835	TG*5
	DL1FD*1			UV		SI+		QB ()	E ()	841	SS*5
	DL2			HV		PS		QBH ()	F	850	ES ()
	DL2FD*1					PSL		QBT ()	GSK		XL
						PSH		QC	NV		
						PD		QC ()	OS ()		
						SDH		SPSH*3	SC		
						AX		SPST*3	WG		
									20G		
									CC ()		
								PC			

Please Specify When Ordering:

Fixture Series	Lens	# of Lamps	Lamp Type	Voltage	# Ballasts	Ballast Type	Reflector	Hanging	Options	Lamp Color	Lamp Options
GUN											

*1 FD Designates Full Door Option, No heat removal.

*4 Consult Factory for Manufacturer Specific Ordering Codes/Availability.

*2 GUN only available with up to 3 – T5HO or 4 – T8 lamps. 4 lamp T5HO GUN is not available due to heat buildup.

*5 Use in lensed fixtures is limited. Contact factory for specific application details.

*3 GUN 4L outfitted with PS and/or JB is not available with a single ballast.


Lens Selections	Ballast Selections	Reflector Selections	Options Selections	Lamp Color Selections:
D23 23 Pattern High Dispersion, High Efficiency DL1 0.118" Clear Lexan DL2 0.220" Clear Lexan	HI High Ballast Factor (HBF) Electronic* LI Low Ballast Factor (LBF) Electronic* SI Standard Ballast Factor (NBF) Electronic* SI+ 1.0BF Electronic* PS Programmed Start (NBF) PSL Programmed Start LBF* PSH Programmed Start HBF* PD Programmed Start Dimming SDH Step Dimming HBF (100% to 60% Dimming)* AX Daylight Harvesting Ballast with remote mount photosensor* * T8 Only	E Enhanced Aluminum W Highly Reflective White Aluminum B 95% Reflective Extreme White Aluminum Hanging Selections BLANK V-Chain Hangers JB Slide-On Junction Box PS Pendant Stabilizer QB Quick Bracket (24", 30" or 36") QBH Quick Bracket with Hook (24", 30" or 36") QBT Quick Bracket for Threaded Rod (24", 30" or 36") QC Quick Hang Cable (10') QC() Quick Hang Cable (Specify Length) SPSH 12" Stem/PS/Hook SPST 12" Stem/PS/Toggle	C() Single Circuit Cord (Specify Length) 6T1 6' Cord with L5-15 Locking End 6T2 6' Cord with L7-15 Locking End E() Emergency Pack (# Lumens) F Inline Fuse GSK Gasket Door Frame & Housing NV No Venting in Housing OS() Occupancy Sensor (Specify Lamps on Low/Lamps on High) SC Safety Cable WG Wire Guard 20G 20 gauge NYC Standards CC() Custom Color (Specify Color) PC Photocell	BLANK Lamps Not Included 830 80+ CRI, 3000K 835 80+ CRI, 3500K 841 80+ CRI, 4100K 850 80+ CRI, 5000K Lamp Options Selections: HP High Performance, Long Life Lamps* A Amalgam Tip Lamps** TG Tubeguarded Lamps SS Shattershielded Lamps ES() Energy Saver (Specify Wattage) XL Long Life* * T8 Only ** T5HO Only

Common Fixture Selections

Catalog Number	System	# of Lamps	Wattage (120/277V)*	Initial System Lumens*	Mean System Lumens*
GUN D23 254 UV 1PS W	T5HO	2	116w / 115w	10,000	9,500
GUN DL1 332 UV 1PSH E	T8	3	110w / 108w	10,695	10,350
GUN D23 354 UV 1PS E	T5HO	3	188w / 185w	15,150	14,393
GUN D23 432 UV 1HI E	T8	4	148w / 145w	14,632	14,160

*Wattages may vary depending on the ballast manufacturer and lamp type used.

Initial and mean system lumens are the initial/mean lumen output of the lamp/ballast system as rated by lamp and ballast manufacturer and may vary from manufacturer to manufacturer. Specifications and dimensions subject to change without notice. Contact Optimum Lighting for current availability and ordering information.

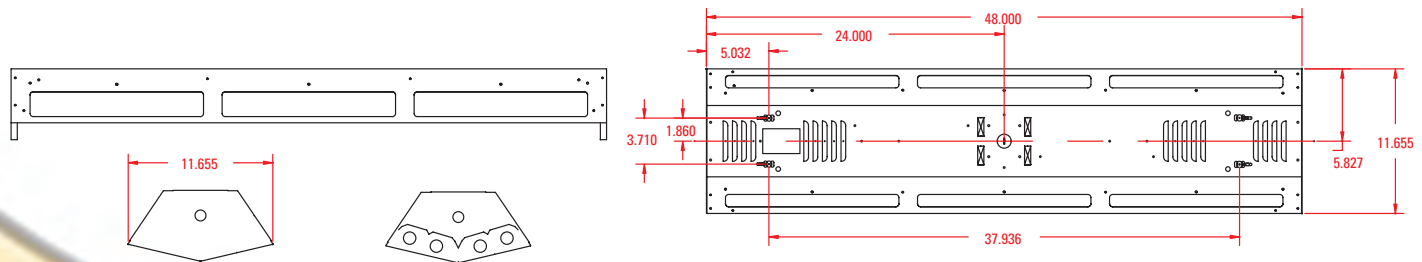

Fixture Type: _____

Catalog #: _____ Quantity: _____

Project: _____